


# User Manual

Model No.: BP-1225U32SAC

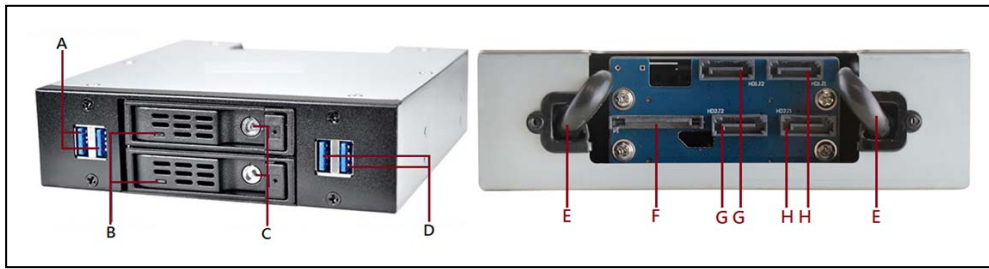

- A = USB 3.0 port 1 and port 2
- B = LED for power on and access
- C = Tri-angle security keylock
- D = USB 3.0 port 3 and port 4

- E = USB 3.0 cable with connector
- F = 15pin SATA Power connector
- G = SAS secondary channel
- A8 = SAS primary channel



- I = Tray for 2.5" HDD/SSD. Use the screws to mount the HDD/SSD (from the bottom side) on the tray.

- Enterprise Grade Extended Module converts a 5.25" bay to 2 Hot-Swappable 2.5"SSD/HDD and 4 USB3.0/2.0 Ports
- An Enterprise Grade Hot-Swappable Integrated 2 x 2.5"SSD/HDD Backplane Module
- The Hot-Swap Backplane Module features a Dual-Channel SAS/SATA Interface Backplane
- The Dual-Channel Backplane supports 2 SAS(III,II,I)/SATA(III,II,I) Interface 2.5" Hot-Swappable SSD/HDD
- The Hot-Swap Backplane Module supports Enterprise Grade Hard Drive (HDD Height up to 15mm)
- Two Integrated SuperSpeed 2-Port USB3.0/2.0 Type-A ports
- The SuperSpeed 2-Port USB3.0/2.0 is Compatible with USB3.0 or USB2.0
- The Hot-Swap HDD Caddy features: Anti-Vibration & EMI Grounding Structure, a Multi-Color LED Indicator, and a 2-Segment Metal Key Lock
- 146(L) x 42(W) x 152(H)mm